


COMPACT LITE CART ASSEMBLY INSTRUCTIONS

| CODE | PART | QTY | QTY | QTY |
|--------------------|-------------------|-----|-----|-----|
| | | G36 | G44 | G48 |
| BAG KIT | | | | |
| GC | Ground cord | 1 | 1 | 1 |
| WI | Wheel Insert | 4 | 4 | 4 |
| N | Nuts | 4 | 4 | 4 |
| S | Screws | 20 | 24 | 24 |
| C | Screw cover | 4 | 4 | 4 |
| DW | Domed washer | 4 | 4 | 4 |
| STAND PARTS | | | | |
| LC | Long crossmember | 6 | 8 | 8 |
| F | Fixtures | 3 | 4 | 4 |
| P | Plant trays | 6 | 4 | 8 |
| R | Slide rods | 2 | 2 | 2 |
| SC | Short crossmember | 2 | 2 | 2 |
| E | End frames | 2 | 2 | 2 |
| W | Wheels | 4 | 4 | 4 |

1. Assemble short cross members **SC** between bottom legs of end frame **E** using the screws **S**, keeping all holes facing the same direction (outside to inside--not up to down). Repeat this step on other end frame **E**.
2. Insert a screw **S** in top hole of end frame **E**. Hang the slide rods **R** over screw. Put a domed washer **DW** on screw with indented side towards the slide rod. Screw on the nut **N**, and tighten. Place a screw cover **C** on the end of the screw.
3. Place another screw **S** through hole on the bottom short cross member **SC** and through the middle of the slide rod **R**.
4. Put a domed washer **DW** on the screw with indented side towards the slide rod **R**, then screw on a nut **N**. Place a screw cover **C** on the end of the screw. Repeat steps 2-4 for other rod.
5. Place the wheel inserts **WI** in the bottom of the end frames **E**. Install the wheels **W**.
6. Place a screw **S** through the hole of the end frames **E** and then into the end of the long cross member **LC**, making sure the long cross member **LC** is on the same side as the slide rods **R**, (this should be on the inside of the unit when finished) and tighten. Repeat this step for the rest of the long cross members **LC**.
7. Place plant trays **P** on the long cross members **LC**.
8. Remove the tubes from the fixture(s) **F** before installing.
9. Adjust the fixture(s) **F** to the desired height and tighten knobs **SECURELY**.
(**Important**: Adjusting fixtures more than 6" per side at once may cause fixture to bend.)

G36/G48

G44

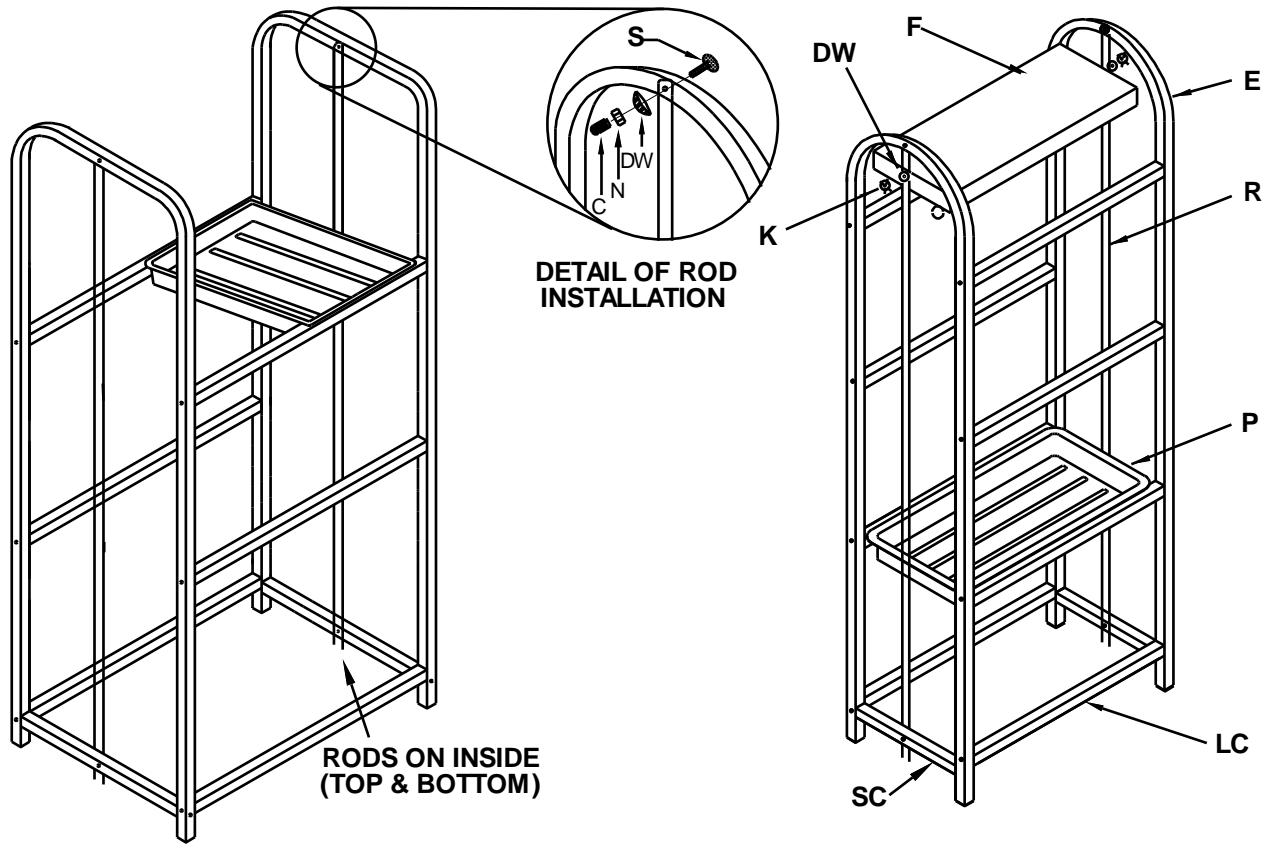

| CODE | PART | CODE | PART |
|-----------|-------------------|-----------|-------------------|
| WI | Wheel insert | S | Screws |
| N | Nuts | P | Plant trays |
| E | End frames | R | Slide rods |
| SC | Short crossmember | DW | Domed washers |
| LC | Long crossmember | C | Black screw cover |
| K | Knob | F | Fixture |

To Prevent Electrical Shock: Connect the eyelet of the enclosed ground cord to any bolt head. The other end should be connected to a ground point such as a water pipe or center screw of a grounded outlet. Please disconnect fixtures when watering plants.